



The
Patent
Office

EPO - D

PCT/EP 99 / 02578



INVESTOR IN PEOPLE

09/673273

12. 05. 1999

(58)

EP 9972578

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP9 1RH

PRIORITY DOCUMENT

REC'D 26 MAY 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

G D Court.
23 APR 1999

THIS PAGE BLANK (USPTO)

THE PATENT OFFICE

D

16 APR 1998

RECEIVED BY POST

16-APR 1998

16-APR 1998 10:00:00 - 9807967.6

our reference

GE01538R/GBRI/HOWELL/RMK/VC

9807967.6

tes
ase type, or write in dark ink
ing CAPITAL letters. A
scribed fee is payable for a
quest for grant of a patent.
details, please contact the
tent Office (telephone
1-438 4700).

le 1 of the Patents Rules 1990
the main rule governing the
mpletion and filing of this form.

Do not give trading styles, for
example, 'Trading as XYZ company',
nationality or former names, for
example, 'formerly (known as) ABC
Ltd' as these are not required.

Warning

After an application for a Patent has
been filed, the Comptroller of the
Patent Office will consider whether
publication or communication of the
invention should be prohibited or
restricted under Section 22 of the
Patents Act 1977 and will inform the
applicant if such prohibition or
restriction is necessary. Applicants
resident in the United Kingdom are
also reminded that under Section 23,
applications may not be filed abroad
without written permission unless an
application has been filed not less
than 6 weeks previously in the United
Kingdom for a patent for the same
invention and either no direction
prohibiting publication or
communication has been given, or
any such direction revoked.

The
Patent
Office

Request for grant of a Patent

Form 1/77

Patents Act 1977

1 Title of invention

1 Please give the title
of the invention

DATA CARRIER SYSTEM

2 Applicant's details

☐ First or only applicant

2a If you are applying as a corporate body please give:

Corporate name

MOTOROLA LTD

Country (and State
of incorporation, if
appropriate)

United Kingdom

2b If you are applying as an individual or one of a partnership please give in full:

Surname

Forenames

2c In all cases, please give the following details:

Address

Jays Close
Viabes Industrial Estate
Basingstoke
Hampshire RG22 4PD
England

UK postcode
(if applicable)

118 000 2

Country

United Kingdom

ADP number
(if known)

1, 2c and 2f: If there are further
ants please provide details on a
separate sheet of paper.

☐ 2d If you are applying as a corporate body please give:
Corporate name

Country (and State
of incorporation, if
appropriate)

2e If you are applying as an individual or one of a partnership please give in full:
Surname
Forenames

2f In all cases, please give the following details:
Address

UK postcode
(if applicable)
Country
ADP number
(if known)

3 An address for service in the
United Kingdom must be supplied
Please mark correct box

3 Address for service details

3a Have you appointed an agent to deal with your application?
Yes ☒ No ☐ → go to 3b
+
please give details below

Agent's name

Agent's address

SARAH GIBSON
MOTOROLA, EUROPEAN
INTELLECTUAL
PROPERTY OPERATIONS
MIDPOINT, ALENCON LINK
BASINGSTOKE, HAMPSHIRE

Postcode

Agent's ADP
number

7272289001 RG21 7PL

If you have appointed an agent, all
correspondence concerning your
application will be sent to the agent's
United Kingdom address.

3b If you have not appointed an agent please give a name and address in the
United Kingdom to which all correspondence will be sent:

Name

Address

Postcode

ADP number
(if known)

Daytime telephone
number (if available)

④ reference number

4 Agent's or
applicant's reference
number (if applicable)

CE01538R/GBRI/HOWELL/RMK/VC

Please mark correct box

⑤ Claiming an earlier application date

5 Are you claiming that this application be treated as having been filed on the date of filing of an earlier application?

Yes ☐ No ☒ → go to 6

↓
please give details below

☐ number of earlier application or patent number

☐ filing date

day month year

☐ and the Section of the Patents Act 1977 under which you are claiming:

Please mark correct box

15(4) (Divisional) ☐ 8(3) ☐ 12(6) ☒ 37(4) ☐

If you are declaring priority from a foreign application please enter "PCT" as the country and enter the country (for example, GB) as part of the application number.

also give the date in full number
and, for example, 31/05/90 for
31 May 1990.

⑥ Declaration of priority

6 If you are declaring priority from previous application(s), please give:

Country of filing	Priority application number (if known)	Filing date (day, month, year)

④ The answer must be "No" if:
any applicant is not an inventor
there is an inventor who is not an
applicant, or
any applicant is a corporate body.

⑤ Please supply duplicates of
claim(s), abstract, description and
drawing(s).

Please mark correct box(es)

You or your appointed agent (see
Rule 90 of the Patents Rules 1990)
must sign this request.

Please sign here ➡

A completed fee sheet should
preferably accompany the fee.

④ Inventorship

7 Are you (the applicant or applicants) the sole inventor or the joint inventors?

Please mark correct box

Yes ☐

No ☒

A Statement of Inventorship on Patents
Form 7/77 will need to be filed (see Rule 15).

⑤ Checklist

8a Please fill in the number of sheets for each of the following types of
document contained in this application.

Continuation sheets for this Patents Form 1/77

Claim(s)

4

Description

8

Abstract

1

Drawing(s)

7

8b Which of the following documents also accompanies the application?

Priority documents (please state how many)

Translation(s) of Priority documents (please state how many)

Patents Form 7/77 – Statement of Inventorship and Right to Grant
(please state how many)

Patents Form 9/77 – Preliminary Examination/Search

Patents Form 10/77 – Request for Substantive Examination

⑥ Request

We request the grant of a patent on the basis of this application.

Sarah Gibson

Signed

SARAH GIBSON

Date

9/4/98
day month year

Please return the completed form, attachments and duplicates
where requested, together with the prescribed fee to either:

☐ The Comptroller
The Patent Office
Cardiff Road
Newport
Gwent
NP9 1RH

or

☐ The Comptroller
The Patent Office
25 Southampton Buildings
London
WC2A 1AY

DATA CARRIER SYSTEM

DUPLICATE

Field of the Invention

5 The present invention relates to a data carrier system, for example, of the type used by communications devices, such as cellular telephones. The present invention also relates to a method of operating the data carrier system.

10 Background of the Invention

It is known in some cellular telephony applications to install and activate a data carrier, such as a Subscriber Identity Module (SIM), in a cellular telephone so as to enable the cellular telephone to operate fully, otherwise a
15 limited service is available. For example, in the Global System for Mobile communication (GSM), a SIM must be installed and activated in a GSM telephone in order to be able to use the GSM telephone, otherwise emergency calls may only be placed.

20 Less common, but still known in the art, is a cellular telephone having the capability of receiving two SIMs (a dual-SIM configuration): a semi-permanently installed SIM or fixed SIM having a first subscription associated therewith, and a visiting SIM having a second subscription associated therewith which may vary depending upon a user of the cellular
25 telephone. The visiting SIM can be installed intermittently when required by the user. In such a configuration, even if both SIMs are electrically coupled to the cellular telephone, only one of the two SIMs is activated, since only one of the first and second subscriptions can be accepted by the network for any single cellular telephone. Therefore, the fixed SIM is usually
30 disregarded or electrically decoupled from the cellular telephone when the visiting SIM is installed, the visiting SIM being activated in preference to the fixed SIM. The fixed SIM is thus not visible to the network.

35 When the visiting SIM is removed, the fixed SIM is activated and the first subscription becomes the active subscription in the network. If another, or the same visiting SIM is re-installed, the fixed SIM is deactivated and the first subscription not used; the new or the same visiting SIM and associated

second or other subscription becomes active. Generally, since the visiting SIM has priority over the fixed SIM, if the visiting SIM is never removed, the fixed SIM is never activated.

- 5 Applications are emerging for cellular telephones integrated into vehicles in order to add functionality to security or safety features of the vehicle. However, in order for such security or safety features to be efficient and effective, data stored on the fixed SIM must be accurate and up-to-date.
- 10 In the above described dual-SIM configuration, this is not realistically achieved, since it is not possible to guarantee that the fixed SIM can be kept up-to-date because of the possibility that the fixed SIM may never communicate with the network for a prolonged period of time. It is therefore an object of the present invention to provide a data carrier system which
- 15 obviates or mitigates the above described problem.

Summary of the Invention

20 According to the present invention, there is provided a data carrier system comprising a first data carrier selectively couplable to a communications device and a second data carrier selectively couplable to the communications device in preference to the first data carrier, the first data carrier being arranged to be decoupled from the communications device when the second

25 data carrier is coupled to the communications device; and during a predetermined period of time the communications device is arranged to be ensured of a supply of power and the second data carrier is arranged to be decoupled from the communications device, thereby causing the first data carrier to be coupled to the communications device for the execution of a task requiring the first data carrier.

30

According to the present invention, there is also provided a method of operating a data carrier system including a first data carrier selectively couplable to a communications device and a second data carrier selectively couplable to the communications device in preference to the first data

35 carrier, the first data carrier being arranged to be decoupled from the communications device when the second data carrier is coupled to the communications device, the method comprising the steps of: during a

predetermined period of time, ensuring a supply of power to the communications device, and decoupling the second data carrier from the communications device, thereby causing the first data carrier to be coupled to the communications device for the execution of a task requiring the first data carrier.

It is thus possible to provide a system and method for updating the first data carrier.

Other, preferred, features and advantages will become apparent from the accompanying description, drawings and dependent claims.

Brief Description of the Drawings

At least one embodiment of the invention will not be described, by way or example, with reference to the accompanying drawings, in which:

FIG. 1 is a schematic illustration of an automobile in the vicinity of a base station of a cellular telephone network;

FIGs. 2 and 3 are schematic diagrams of apparatus constituting an embodiment of the invention;

FIGs. 4 to 6 are flow diagrams of a method of operation of the apparatus of FIGs. 2 and 3 in one embodiment of the invention, and

FIGs. 7 to 11 are flow diagrams of another method of operation of the apparatus of FIGs. 2 and 3 in another embodiment of the invention.

Description of a Preferred Embodiment

A vehicle, such as an automobile 100, includes a cellular telephone 102, such as a GSM International 2000 cellular telephone manufactured by Motorola Electronic GmbH electrically connected to a trunk unit 104 having a first SIM card reading unit 214 (FIG. 2), typically located in the boot (sometimes referred to as the 'trunk') of the automobile 100. The cellular telephone 102

(FIG. 1) is electrically connected (not shown) to an antenna 106 for communication with a base station 108 of a GSM cellular telephone network, via a radio interface 110.

5 The first SIM card reading unit 214 receives and holds, on a semi-permanent basis, a first SIM card 200 (hereinafter referred to as the "fixed SIM"). Referring to FIG. 3, the cellular telephone 102 has a second SIM card reading unit 304 for reading a second SIM card 300 (hereinafter referred to as the "visiting" SIM) and a keypad 306 comprising an on/off key 308 for
10 powering-up and powering-down the cellular telephone 102. By "power-down" (or "unpower"), it is meant that the cellular telephone 102 enters a "stand-by" mode where a keypad of the cellular telephone 102 is disabled, a display of the cellular telephone 102 is switched off, and any indication of the cellular telephone 102 being in service is removed, i.e. there is no indication
15 to a user that the cellular telephone 102 is active. The second SIM card reading unit 304 receives, through a slot 302, the visiting SIM 300 on a permanent or temporary basis.

The first or second SIM card 200, 300 can be contactless smartcards.
20

It should be noted that it is also conceivable to locate the second SIM card reading unit 304 elsewhere in the automobile 100 which is accessible to a user.

25 The trunk unit 104 (FIG. 2) comprises a microcontroller 202 having a first terminal 204, a second terminal 206, a third terminal 208, and a fourth terminal 212, the first terminal 204 being connected to an accident detection unit 205, for example, a sensor for detecting the deployment on an airbag. The second terminal 206 is connected to a Global Positioning System (GPS)
30 receiver 210 for the determination of a location of the automobile 100. The third terminal 208 is connected to other interfaces, for example, coupled to a security unit 209 for managing the security of the automobile 100. Additionally, or alternatively, the other interfaces can be coupled to a key, button or switch acting as a "panic button" 211 (hereinafter referred to as
35 the panic button). The fourth terminal 212 is connected to the cellular telephone 102 located in a cabin of the automobile 100.

The second SIM card reading unit 214 is also connected to the cellular telephone 102 via a switch 216, the switch 216 being under the control of the microcontroller 202 and connected to a fifth terminal 218 of the microcontroller 202.

5

In each embodiment of the invention, electrical connection and activation of the fixed SIM 200 is required in order to execute a task. The task can be to update data stored by the fixed SIM 200 relating to addresses to be automatically contacted in emergency or other situations, such as upon
10 compromise of the security of the automobile 100. In the event of an accident or other emergency, the emergency services need to be contacted. Also, it can be desirable to collect and/or transmit information relating to the performance of the automobile 100. In the event of the security of the automobile 100 being compromised, the security services/the police need to
15 be contacted.

During normal operation, examples embodiments of the invention function as follows.

20 Referring to FIG. 4, the cellular telephone 102 polls the keypad 306 in order to determine (step 400) when the user has pressed the on/off key 308 in order to power-down the cellular telephone 102 into stand-by mode. When actuation of the on/off key 308 has been detected (step 400), the cellular telephone 102 executes (step 402) an update routine 500 (FIG. 5) for the
25 fixed SIM 200.

The update routine 500 includes the following steps. The cellular telephone 102 determines (step 502) whether the visiting SIM 300 has been installed. If the visiting SIM 300 has been detected as installed, the visiting SIM 300 is
30 electrically disconnected or ignored (step 504), and the fixed SIM 200 is electrically connected (step 506) and enabled (step 508). This can be achieved by the cellular telephone 102 instructing the microprocessor 202 to actuate the switch 216 through the fifth terminal 218. If the cellular telephone 102 determines (step 502) that the visiting SIM 300 is not
35 installed, the fixed SIM 200 is activated (step 506) without disconnecting (step 504) the visiting SIM 300 and connecting (step 506) the fixed SIM 200; this is because, in the absence of the visiting SIM 300, the system typically

automatically defaults to the connection and activation of the fixed SIM 200. A GSM dialogue (step 510) is then initiated. The dialogue can be the transmission and/or receipt of a Short Messaging Service (SMS) message, a telephone call involving the transmission of data or any other form of dialogue known in the art for the purpose of updating the fixed SIM 200. The data to be updated can be data relating to addresses described above. Once the dialogue has been completed, an inactivity timer (not shown) is initiated (step 512) for the purpose of powering-up the cellular telephone at a predetermined interval, for example, every day, week, or month, in order to update the fixed SIM 200. The update routine 500 then terminates and (FIG. 4) the cellular telephone is permitted to power-down (step 404).

In a further example (FIG. 6), the cellular telephone 102 monitors the inactivity timer and determines (step 600) when the predetermined interval has expired. When the predetermined interval has expired, the cellular telephone 102 powers-up (step 602) automatically (i.e. without intervention by the user) and executes (step 604) the update routine 500 (FIG. 5) for the fixed SIM 200 described above. Once the update routine 500 has been executed, the cellular telephone 102 powers-down (step 606).

In an example of another embodiment (FIG. 7), the accident detection unit 205 monitors the sensors to determine (step 700) whether an accident has occurred, for example the detection of deployment of the airbag. If the accident has been detected, the cellular telephone 102 executes (step 702) a contact routine 800 (FIG. 8). The contact routine includes the following steps.

The cellular telephone 102 determines (step 802) whether the visiting SIM 300 is installed and activated. If the visiting SIM 300 is installed and activated, the cellular telephone 102 electrically disconnects or ignores (step 804) the visiting SIM 300 and electrically connects (step 806) the fixed SIM 200. The fixed SIM 200 is then activated (step 808). If the cellular telephone determines (step 802) that the visiting SIM 300 is not installed or activated, the fixed SIM 200 is activated without disconnecting (step 804) the visiting SIM 300 and connecting (step 806) the fixed SIM 200. The cellular telephone 102 then communicates (step 810) with an appropriate service, for example the police and/or ambulance service, by data

communication, such as SMS, or voice communication, such as a pre-recorded message. The contact routine 800 then terminates and the cellular telephone 102 proceeds to reconnect (step 704) and activate any visiting SIM 300 installed in the cellular telephone 102.

5

In an another example of this embodiment (FIG. 9), the cellular telephone 102 monitors (step 900) the other interfaces, via the microcontroller 202, for the actuation of the panic button 211. When the cellular telephone detects that the panic button has been actuated, the cellular telephone 102 executes (step 902) the contact routine 800 described above. However, in this case the appropriate service contacted (step 810) is the police. Once a message has been sent to the police, the cellular telephone 102 reconnects (step 904) any visiting SIM 300 installed in the cellular telephone 102.

15 In a further example of this embodiment (FIG. 10), the cellular telephone 102 polls the security unit 209 in order to determine (step 1002) whether an unauthorised party is tampering with the automobile 100 or whether the automobile 100 has been stolen. If any of the above conditions have been detected (step 1002), the cellular telephone 102 executes (step 1004) the contact routine 800. Again, the appropriate service contacted (step 810) can be the police or a security company which monitors the security of the automobile 100. Whilst contacting the police or the security company, the cellular telephone 102 receives position data relating to the location of the automobile 100 from the GPS receiver 210 and communicates the position data to the police and/or the security service. Once the contact routine 800 has terminated, the cellular telephone 102 ensures (step 1006) that the fixed SIM 200 remains electrically connected and activated so as to communicate updated position data, if necessary.

30 In another example of the above embodiment (FIG. 11), the cellular telephone 102 receives (step 1102) data from a sensor connected to the odometer. At a second predetermined interval (which can be the same as the first predetermined interval), the cellular telephone 102 then executes (step 1104) the contact routine 800. In this example, the cellular telephone 102 contacts the manufacturer of the automobile 100 or a garage responsible for maintenance of the automobile 100, and communicates the odometer reading to the manufacturer or the garage. Once the contact routine 800 has

35

terminated, the cellular telephone 102 reconnects (step 1106) and activates any visiting SIM 300 installed in the cellular telephone 102.

5 Such a procedure as described above can be executed whilst the cellular telephone 102 is powered-up, or alternatively, whilst the cellular telephone 102 is powered-down or upon initial powering-up of the cellular telephone 102 so as to minimise delay to the user in using the cellular telephone 102.

10 It is conceivable that in addition to or instead of the odometer reading other information can be communicated to the manufacturer or the garage, for example, details of faults detected by an engine management system or other sensors.

Claims

1. A data carrier system comprising a first data carrier selectively couplable to a communications device and a second data carrier selectively couplable to the communications device in preference to the first data carrier, the first data carrier being arranged to be decoupled from the communications device when the second data carrier is coupled to the communications device; and during a predetermined period of time the second data carrier is arranged to be decoupled from the communications device, thereby causing the first data carrier to be coupled to the communications device for the execution of a task requiring the first data carrier.
2. A system as claimed in Claim 1, wherein during substantially at least the predetermined period of time the communications device is arranged to be ensured of the supply of power by maintaining the supply of power to the communications device in response to a command to extinguish the supply of power to the communications device, thereby facilitating execution of a task requiring the first data carrier.
3. A system as claimed in Claim 1, wherein the communications device is actuatable between a powered state and an unpowered state, the communications device being arranged to be actuated from the unpowered state to the powered state at a predetermined interval for substantially at least the predetermined period of time.
4. A system as claimed in any one of the preceding claims, wherein the first data carrier is a smartcard.
5. A system as claimed in any one of the preceding claims, wherein the second data carrier is a smartcard.
6. A system as claimed in Claim 4 or Claim 5, wherein the smartcard is a contactless smartcard.

7. A system as claimed in Claim 4 or Claim 5, wherein the smartcard is a Subscriber Identity Module.

5 8. A system as claimed in any one of the preceding claims, further comprising means for receiving the first data carrier, wherein the first data carrier arranged to be substantially permanently in engagement with the means for receiving the first data carrier.

9. A system as claimed in any one of the preceding claims, further
10 comprising location determining means.

10. A system as claimed in Claim 9, wherein the location determining means is a Global Positioning System receiver.

15 11. A cellular telephone comprising the system as claimed in any one of the preceding claims.

12. A vehicle comprising the system as claimed in any one of Claims 1 to
11.

20 13. A method of operating a data carrier system including a first data carrier selectively couplable to a communications device and a second data carrier selectively couplable to the communications device in preference to the first data carrier, the first data carrier being arranged to be decoupled
25 from the communications device when the second data carrier is coupled to the communications device, the method comprising the steps of:

during a predetermined period of time, ensuring a supply of power to the communications device, and

30 decoupling the second data carrier from the communications device, thereby causing the first data carrier to be coupled to the communications device for the execution of a task requiring the first data carrier.

14. A method as claimed in Claim 13, further comprising, during
substantially at least the predetermined period of time, ensuring the supply
35 of power by maintaining the supply of power to the communications device in response to a command to extinguish the supply of power to the

communications device, thereby facilitating execution of a task requiring the first data carrier.

5 15. A method as claimed in Claim 13, wherein the communications device is actuatable between a powered state and an unpowered state, and further comprising actuating the communications device from the unpowered state to the powered state at a predetermined interval for substantially at least the predetermined period of time.

10 16. A method as claimed in any one of Claims 13 to 15, wherein the first data carrier is a smartcard.

17. A method as claimed in any one of Claims 13 to 16, wherein the second data carrier is a smartcard.

15

18. A method as claimed in Claim 16 or Claim 17, wherein the smartcard is a contactless smartcard.

20 19. A method as claimed in Claim 16 or Claim 17, wherein the smartcard is a Subscriber Identity Module.

25 20. A method as claimed in any one of the preceding claims, further comprising providing means for receiving the first data carrier, and substantially permanently engaging the first data carrier with the means for receiving the first data carrier.

21. A method as claimed in any one of the preceding claims, further comprising providing location determining means.

30 22. A method as claimed in Claim 21, wherein the location determining means is a Global Positioning System receiver.

35 23. A data carrier system substantially as hereinbefore described with reference to accompanying FIGs. 2 and 3.

24. A method of operating a data carrier system substantially as hereinbefore described with reference to accompanying FIGs. 4 to 6, 7 and 8, 8 and 9, 8 and 10, or 8 and 11.


DATA CARRIER SYSTEM

Abstract of the Invention

- 5 A cellular telephone (102) in a vehicle includes a data carrier system comprising a first semi-permanent Subscriber Identity Module (SIM) (200) selectively couplable to the cellular telephone (102) and a second SIM (300) selectively couplable to the cellular telephone (102) in preference to the first SIM (200), the first SIM (200) being arranged to be decoupled from the
- 10 cellular telephone (102) when the second SIM (300) is coupled to the cellular telephone (102). During a predetermined period of time, the cellular telephone (102) is arranged to be ensured of a supply of power and the second SIM (300) is arranged to be decoupled from the cellular telephone (102), thereby causing the first SIM (200) to be coupled to the cellular
- 15 telephone (102) for the execution of a task requiring the first SIM (200).

(FIG. 2 and 3)

9807967.6

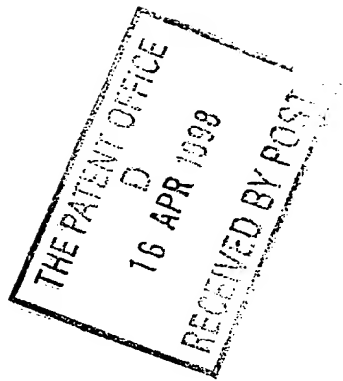

THIS PAGE BLANK (USPTO)

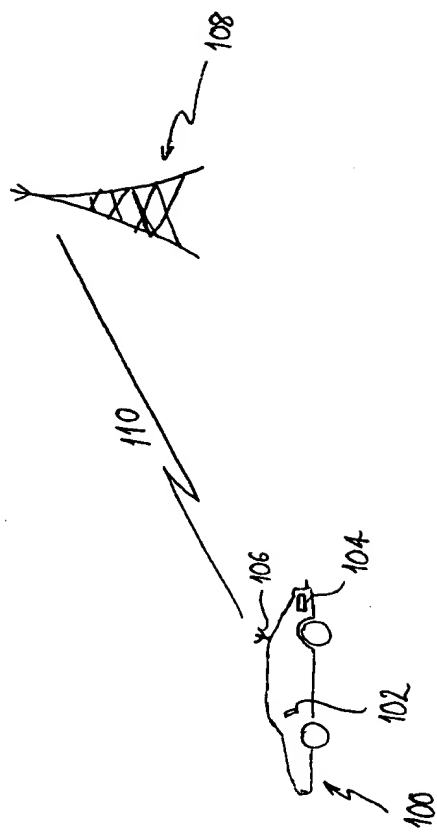



FIG. 1

NOT TO BE AMENDED

9807967-6

THIS PAGE BLANK (USPTO)

FIG. 2

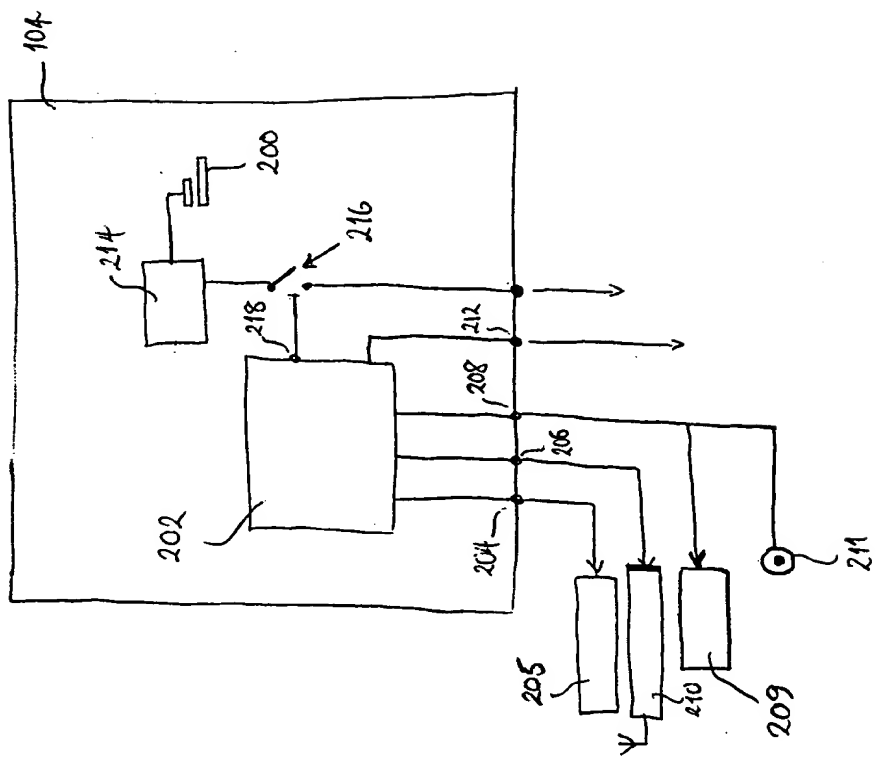

9807967.6

NOT TO BE AMENDED

THIS PAGE BLANK (USPTO)

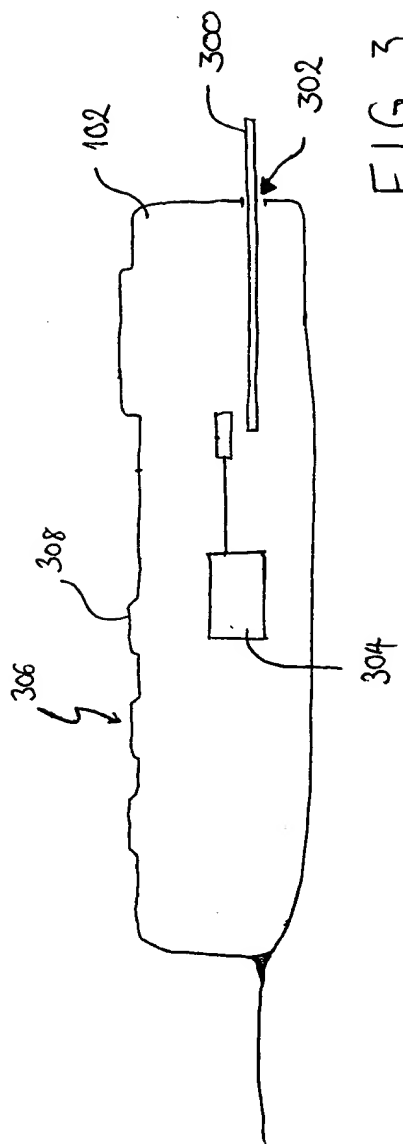


FIG. 3

NOT TO BE AMENDED

9807967.6

THIS PAGE BLANK (USP)

FIG. 4

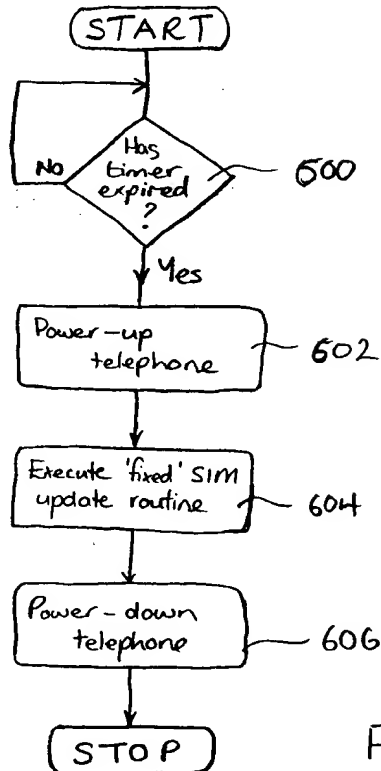
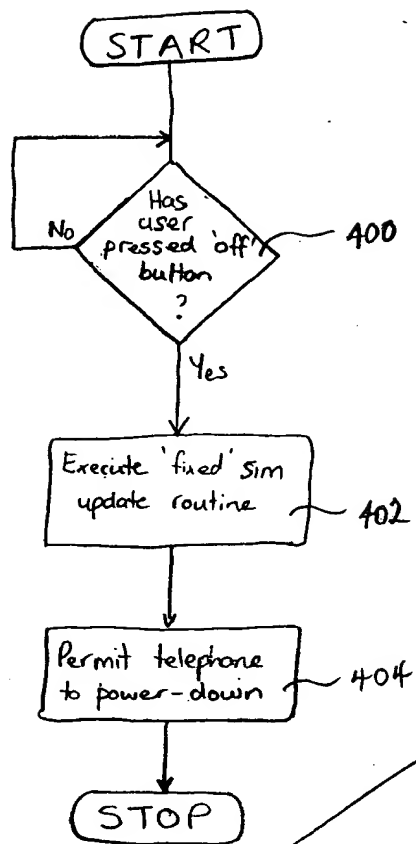


FIG. 5

NOT TO BE AMENDED

● 9807967.6

THIS PAGE BLANK (USPTO)

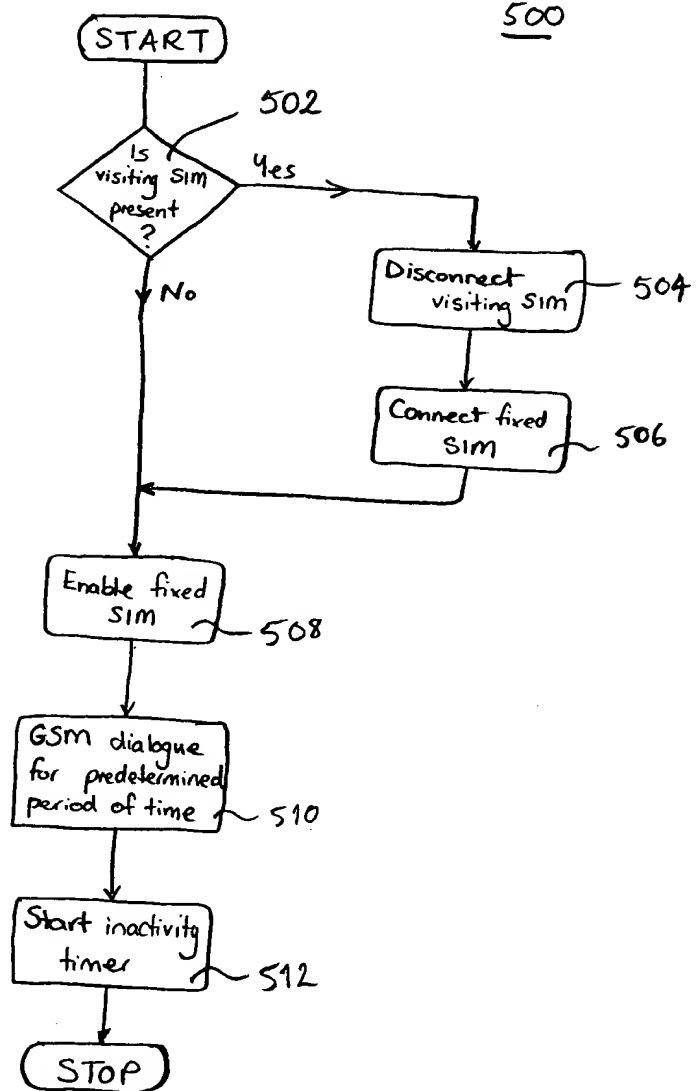


FIG. 5

NOT TO BE AMENDED

9807967.6

THIS PAGE BLANK (USPTO)

800

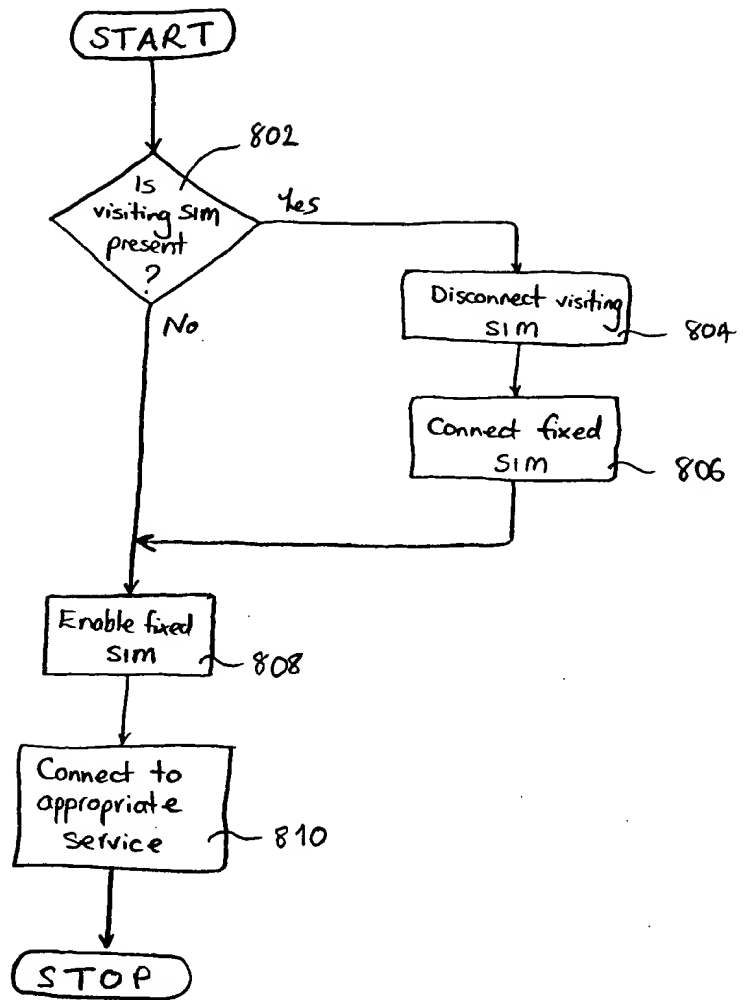


FIG. 8

NOT TO BE AMENDED

807967.6

THIS PAGE BLANK (USPTO)

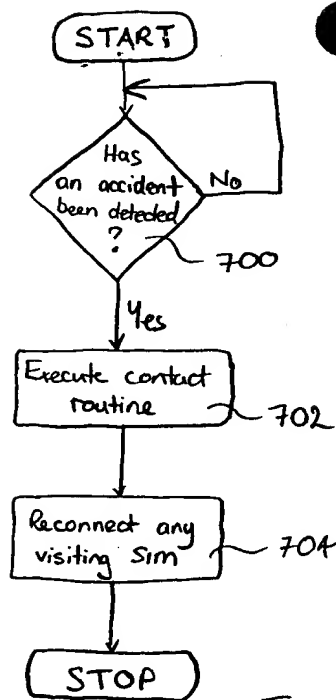


FIG. 7

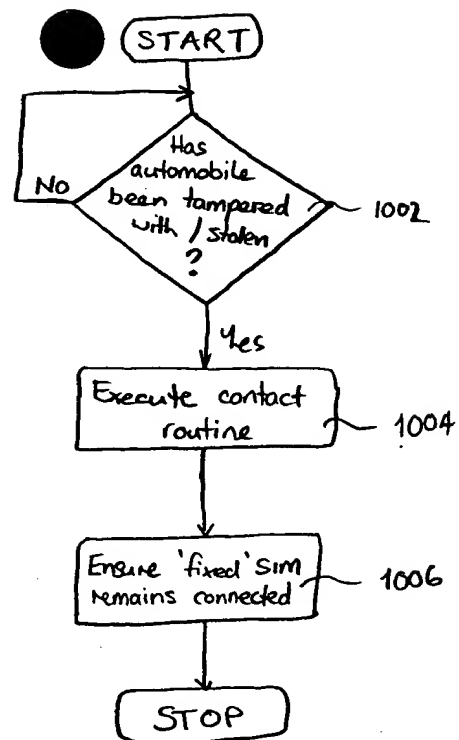


FIG. 10

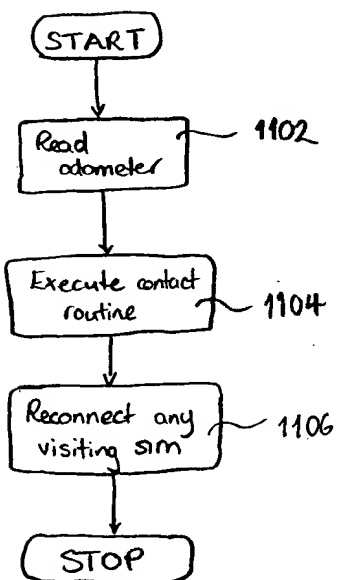


FIG. 11

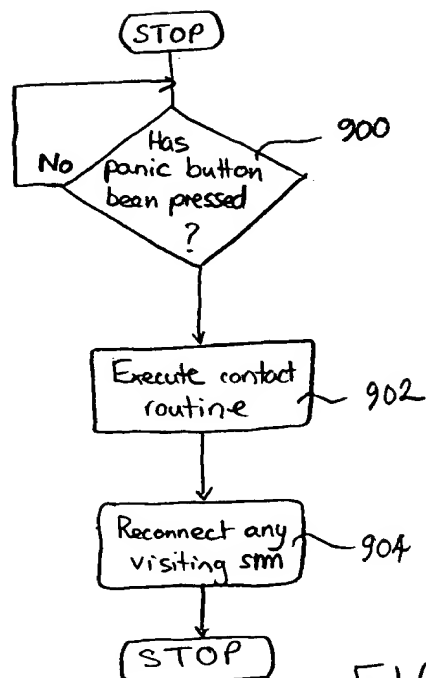


FIG. 9

9807967.6

NOT TO BE AMENDED

THIS PAGE BLANK (USPTO)